


M-PLASTIC PROFILE MGSI® EP20398003.2



Joint Detail

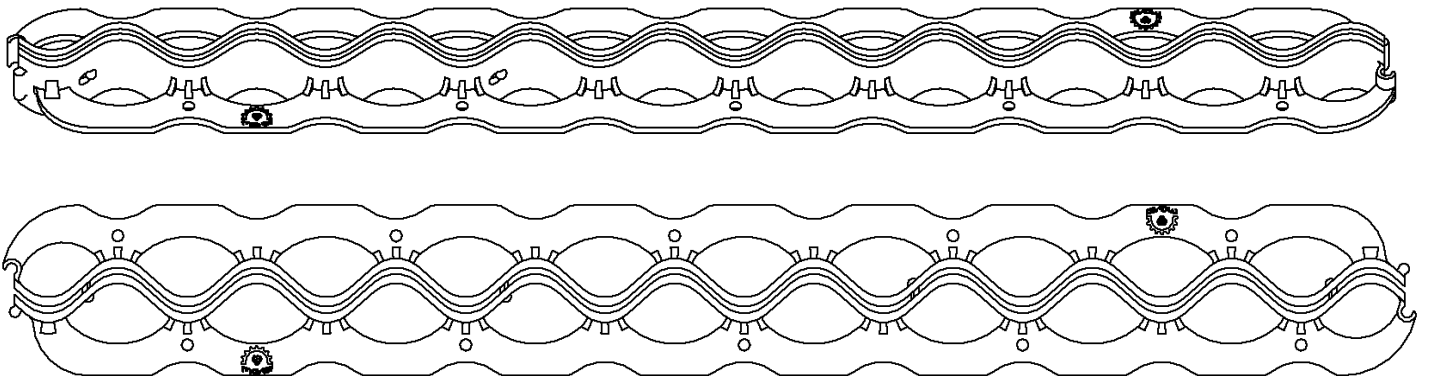


ONDULATED JOINT PROFILE


Joint ideal for pedestrian and wheeled traffic areas

- No impact on passing vehicles under the joint;
- Extended floor life;
- Well defined joint line.

Joint dimensions

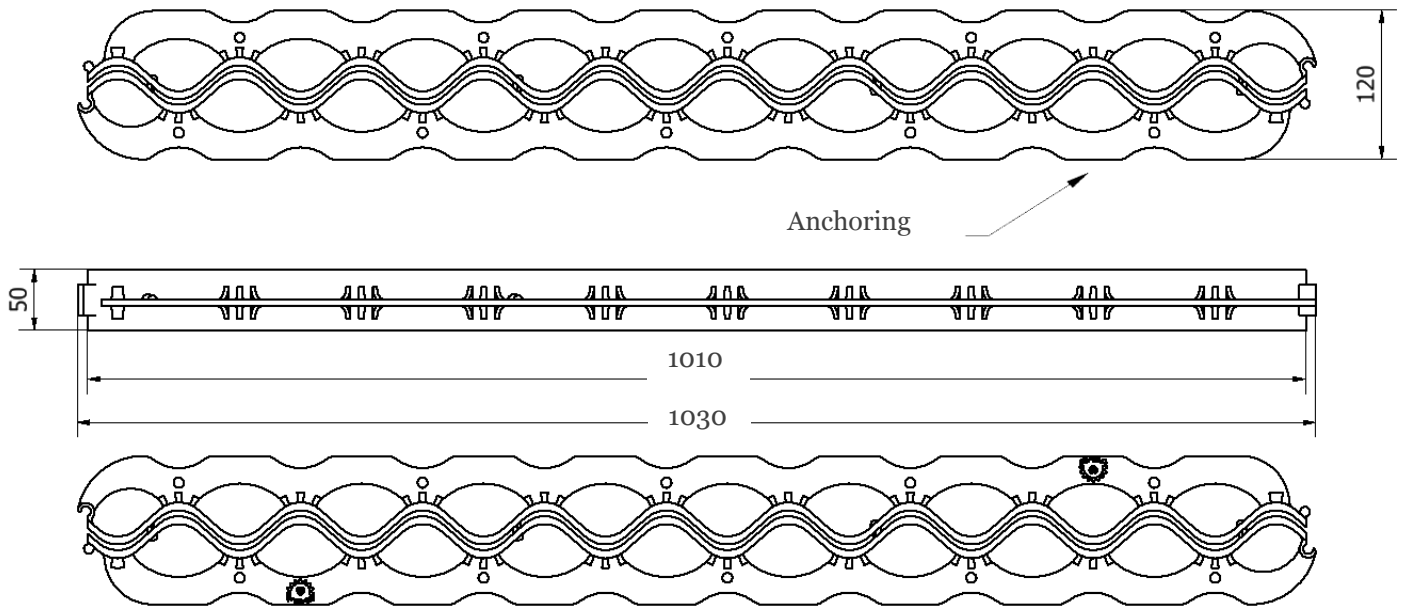


Two pre-opening positions

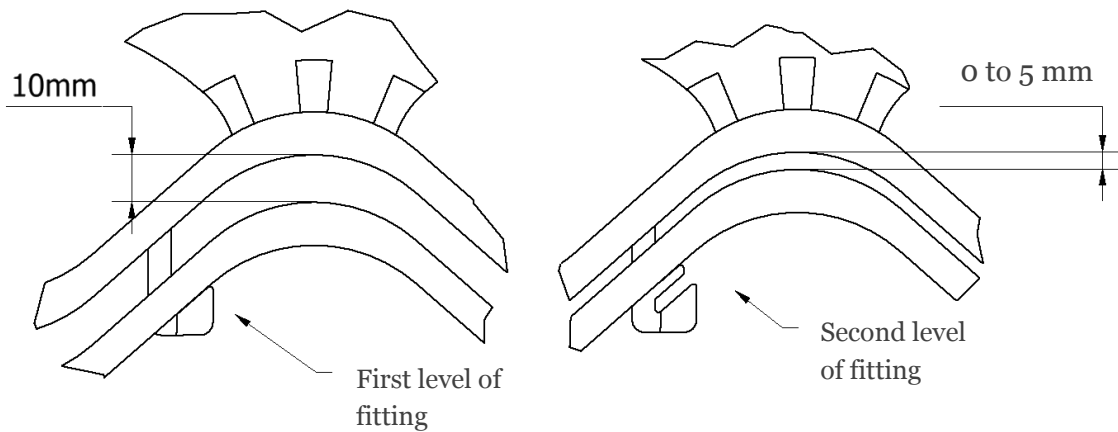

The profile has two interlocking levels, and you must select the one that best suits your situation: For floors where large linear thermal expansion is foreseen (exterior floors for example) the first interlocking position is used while that for floors where this expansion is not expected, the second position can be used (sheltered floors, for example).

Fitting between longitudinal profiles

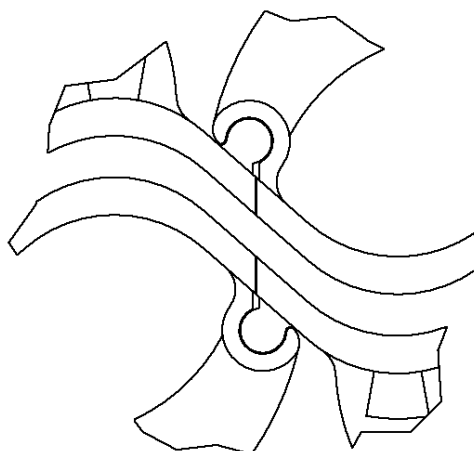

The profiles have longitudinal fittings that allow a solid union between profiles thus making the assembly of the set quick and easy.

Material

Composition	Polycarbonate
Colour	Black
Medium density	1200 kg/m ³